


CONCRETE CURB DETAIL

NOT TO SCALE

NOTES:

1. CONCRETE SHALL BE 3500 PSI AT 28 DAYS, AIR-ENTRAINED.
2. TRANSVERSE EXPANSION JOINTS SHALL BE PROVIDED AT 20 FOOT INTERVALS WITH PRE-MOLDED, BITUMINOUS JOINT FILLER, RECESSED $\frac{1}{4}$ " FROM SURFACE.
3. HALF DEPTH CONTRACTION JOINTS SHALL BE PROVIDED AT 10 FOOT INTERVALS.
4. 18" CURB DEPTH SHALL BE MAINTAINED AT DEPRESSED OR FLUSH CURBED AREAS.

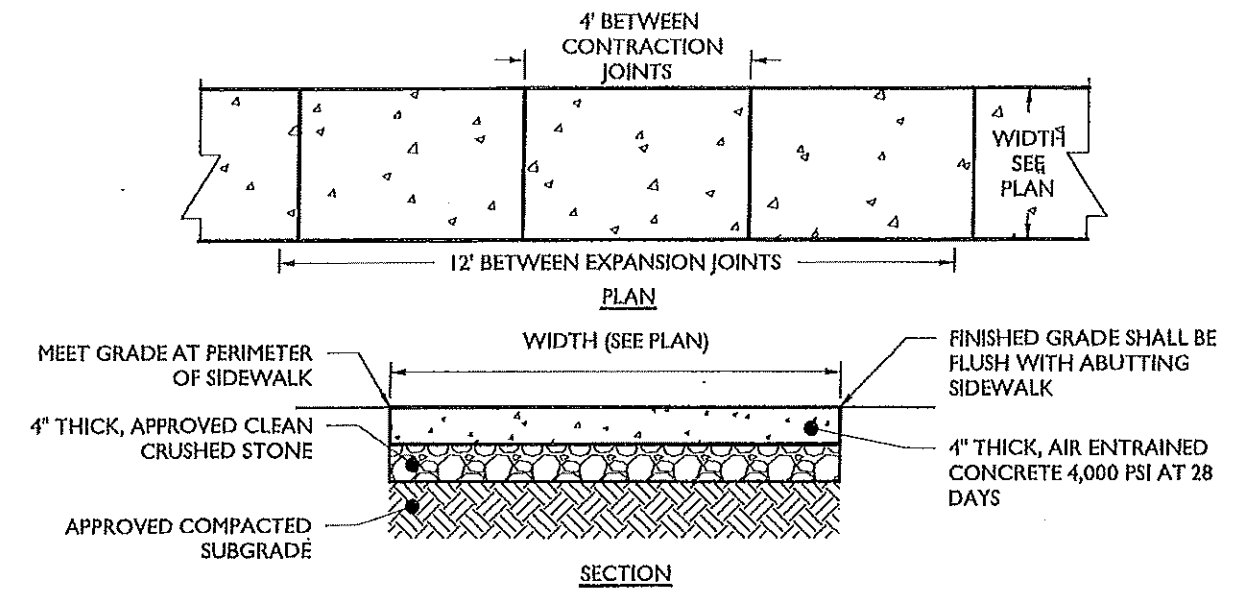

CONCRETE WALKWAY DETAIL

NOT TO SCALE

NOTES:

1. MAXIMUM CROSS SLOPE SHALL BE $\frac{1}{4}$ " PER FOOT.
2. $\frac{1}{4}$ " EXPANSION JOINTS SHALL BE PROVIDED AT 12' INTERVALS WITH PRE-MOLDED, BITUMINOUS JOINT FILLER, RECESSED $\frac{1}{4}$ " FROM THE SURFACE.
3. 1" DEEP BY $\frac{1}{4}$ " WIDE, TOOLED CONTRACTION JOINTS SHALL BE PROVIDED AT 4' INTERVALS.
4. EXPANSION JOINT SHALL BE PROVIDED WHERE ADJACENT TO A BUILDING.

Aprons- Driveway aprons are to be 4000 lb. concrete; 6 inches thick; with wire mesh 6/6 x 10/10